


DVI KVM Extender

DL-Vision 7.0

KVM Extender

Extender systems to bridge IT-distances



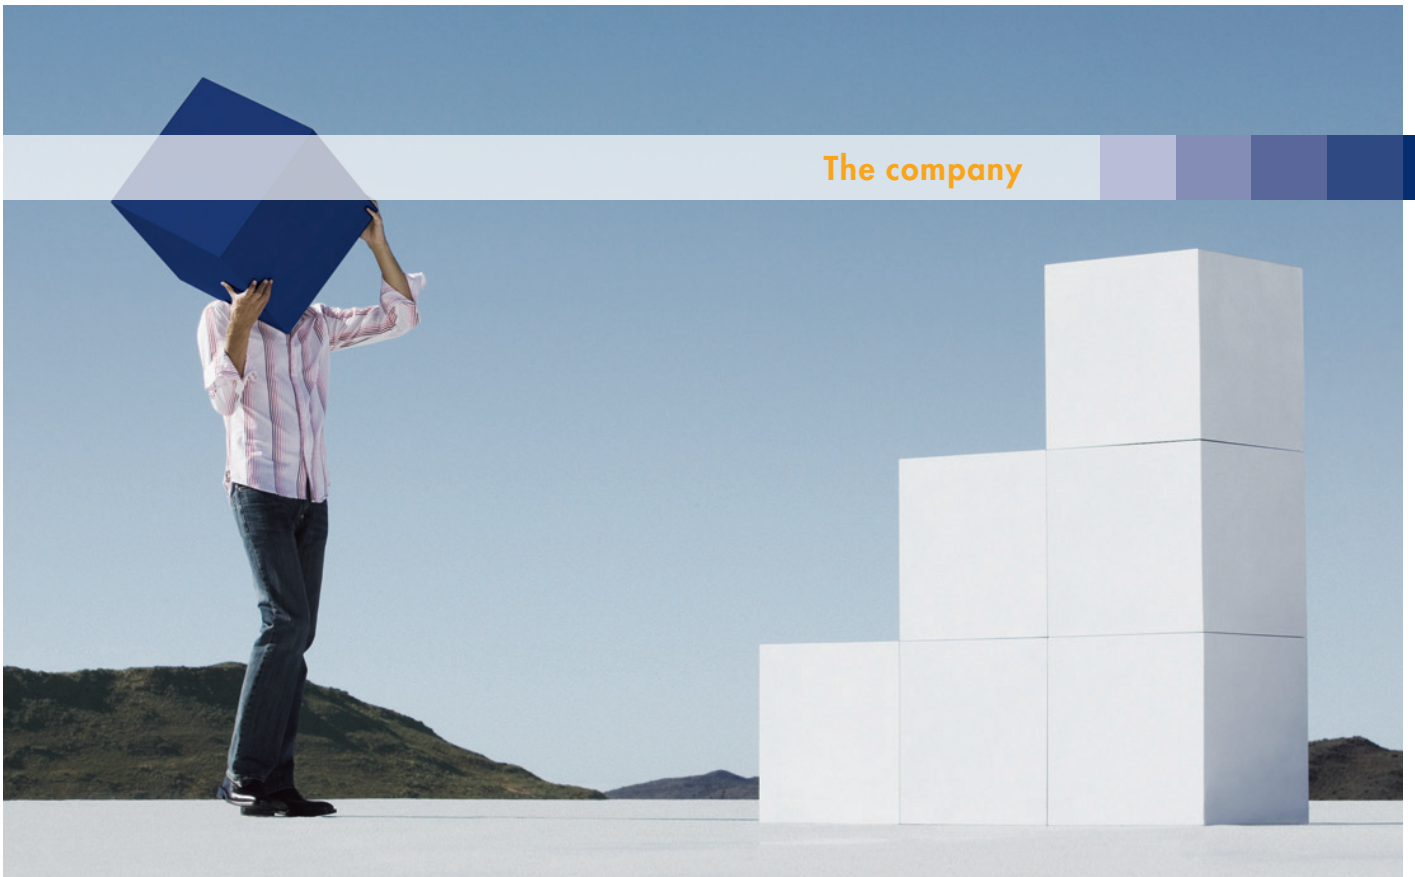

Leading the Way in digital KVM

Guntermann & Drunck GmbH has been established in 1985 and is named after its founders. Over 25 years have since past, and we are now a leading manufacturer of digital and analog KVM switching systems.

As an owner-managed company we work with a broad range in both digital and analog KVM closely with the marketplace and make our decisions with and in the interests of our customers. It is our philosophy to meet our customers while making decisions, to accompany them in the process and ensure that they achieve their goals.

We can do this because as a medium sized company we have short communication paths and all core competencies are in house – from development through to production. This way we can even make the impossible possible at times. If it is thanks to the modularity of the products or by implementing a customised solution. We orient ourselves towards the needs of the customer – and not the other way round.

Organisations, service providers and companies of all sizes managing numerous computers, servers and other network devices trust the comprehensive advice and service provided by Guntermann & Drunck GmbH.

Thanks to these different fields of specialisation, the demands placed on the products are many and are manifold. Our products have to provide a long-life service, be secure, uncomplicated, user-friendly, understandable and adaptable.

The DL-Vision(M/S) KVM extender system extends the following signals:

- keyboard/mouse
- dual-link DVI
- audio
- RS232
- USB 2.0

The system consists of a computer module (transmitter) and a user module (receiver) and facilitates the remote operation of one computer. At each module, a console can be connected.

DL-Vision(M/S) uses fibre optics (two fibres) to transmit uncompressed and lossless signals up to 300 or 10,000 m. The devices are available as variants displaying one or two video channels.

With its network connection, web interface, and DLV-Monitoring function, the DL-Vision(M/S) system offers important features for mission-critical applications.



above: DL-Vision(S)-ARU2-CPU computer module
below: DL-Vision(S)-ARU2-CPU user module

Highlights

Video

- single- and dual-link DVI
- 2k resolution (2048 x 2048 @ 60 Hz)
- uncompressed, lossless transmission in 1:1 performance
- support of Barco PVS graphics card
- single- and multi-channel variants

Operation

- at both modules console with all video channels

Signals

- PS/2 and USB keyboard/mouse support
- audio and RS232 transmission included in standard

Network / Communication / Safety

- two network interfaces
- configuration over web interface
- monitoring and reporting of operating status over web interface
- report and request of system status via SNMP trap and agent
- logbook: electronic notes about the device; can be exported as .csv file
- Ident-LED facilitate locating of devices in complex installations
- redundant power supply

DLV-Monitoring

The DLV-Monitoring function enables you to auto-output device status messages to Syslog servers or SNMP. The web interface lets you monitor the device manually. The Monitoring function of the DL-Vision(M/S) queries the following values:

- proactive monitoring of device states
- event reporting function (Syslog or SNMP traps)
- status power supply unit (on/off)
- status temperature threshold device (in/over limit)
- status connection cable (ok/nok)
- status computer (on/off)
- status image signal graphics card computer (available/not available)
- status of access settings (what rights are assigned to the user?)

Screen-Freeze Function

If the display loses the video signal due to a broken connection or a problem with the computer's graphics card, the Screen-Freeze function „freezes“ the image last displayed on the monitor. This state is highlighted by a red semi-transparent frame. The function is automatically cancelled when the display receives an active video signal.

Features

Video

- resolutions up to 2560 × 1600 @ 60 Hz or 2048 × 2048 @ 60 Hz per channel
- backward-compatible to single-link DVI
- video bandwidth up to 330 Mp/s
- 24 bit colour mode
- transparent forwarding of E-DDC information

Transmission

- 10,000 m over 2 singlemode fibers (9/125 µm, 2,000 MHz*km, OS1)
- 300 m over 2 multimode fibers (50/125 µm, 2,000 MHz*km, OM3)
- 82 m over 2 multimode fibers (50/125 µm, 500 MHz*km, OM2)
- 66 m via 2 multimode fibers (50/125µm, 400 MHz*km)
- 33 m via 2 multimode fibers (62.5/125 µm, 200 MHz*km, OM1)
- 26 m via 2 multimode fibers (62,5/125 µm, 160 MHz*km, FDDI-grade)
- uncompressed, lossless transmission with 1:1 performance
- connection over 2 × LC single plugs

- bidirectional transmission of audio and RS232 as default
- Screen Freeze function as default
- transparent transmission of USB 2.0

Device

- galvanic separation of transmitter and receiver
- insensitive to interference radiation
- two integrated network ports
- configuration via web interface
- redundant power supply
- PS/2 and USB keyboard/mouse supported; also mixed operation
- permanent keyboard/mouse emulation
- available as desktop and rack mount version

System upgrade

- via wizard at service socket or over network (web interface)

Variants

Design

- units are supplied as desktop variants
- 19" rackmount kit included

Video channels

- single-channel or multi-channel 2 variant

Expansion

DevCon support

DL-Vision(M/S) uses the network to communicate with the appliance DevCon-Center. If you employ more than one DL-Vision(M/S), the devices can be queried and configured via DevCon-Center.

DLV-Power

DLV-Power enables you to power on or power off a computer remotely (reset and ATX power switching) over an implemented slot card, which is connected to the computer module. The customer provides the required operating hardware at the remote side (e.g. a button), which is connected to the user module.

The function is available for all DL-Vision(M/S) variants. For further details, please contact our sales team

Installation

Link the computer to the back of the DL-Vision(M/S) transmitter. Distinctive cables connect the computer's keyboard, video, mouse, audio, RS232, and USB interfaces to the DL-Vision(M/S) computer module.

Installing the user console is just as easy: simply connect the operating hardware with the corresponding interfaces of the DL-Vision(M/S) receiver.

Use the existing cabling structure to link transmitter and receiver.

Feel free to download the DL-Vision(M/S) manual to find out more details about the start-up.

DL-Vision Single-Channel



left: DL-Vision-(S)-ARU2-CPU computer module
right: DL-Vision-(S)-ARU2-CPU user module

	Computer module	User module
Video		
Number of monitors	1	1
Signal type/video	DVI dual link, backward-compatible to single link	
Resolution	up to 2560 × 1600 @ 60 Hz or 2048 × 2048 @ 60 Hz	
Standards	E-DDC support	
Colour depth	24 bit	
Pixel rate	up to 330 MHz	
Interfaces for user console	1 × DVI-D socket	1 × DVI-D socket
Interfaces to computer	1 × DVI-D socket	
Keyboard/Mouse		
Interfaces for user console	2 × Mini-DIN 6 socket	
	2 × USB-A socket	
Interfaces to computer	2 × Mini-DIN 6 socket	
	1 × USB-B socket	
Audio		
Design	internal	
Sampling rate	96 kHz	
Resolution	24 bit digital, stereo	
Bandwidth	22 kHz	
Interfaces for user console		1 × 3.5 mm jack plug (speaker)
Interfaces to computer	1 × 3.5 mm jack plug (line in)	
RS232		
Design	internal	
Transmission rate	max. 230,400 bit/s	
Transmittable signals	RxD, TxD, RTS, CTS, DTR, DSR, DCD	
Interfaces for user console		1 × D-Sub 9 plug
Interfaces to computer	1 × D-Sub 9 socket	
Transparent USB 2.0		
Design	internal	
Transmission rate	up to 2,000 m	
USB power supply	High Power devices up to 500 mA	
USB transmission rate	up to 480 mbps	
Interfaces for user console		4 × USB-A socket
Interfaces to computer	1 × USB-B socket	

DL-Vision Single-Channel

Transmission		
Type of cable connection	dedicated fiber optic link	
Transmission cable type	fiber optics	
Transmission length	10,000 m over singlemode fibers (9/125 µm, 2.000 MHz*km, OS1) at max. resolution	
	2,000 m over singlemode fibers (9/125 µm, 2,000 MHz*km, OS1) at max. resolution	
	550 m over multimode fibers (50/125 µm, 500 MHz*km, OM2) at max. resolution	
	500 m over multimode fibers (50/125 µm, 400 MHz*km) at max. resolution	
	275 m over multimode fibers (62,5/125 µm, 200 MHz*km, OM1) at max. resolution	
	220 m over multimode fibers (62,5/125 µm, 160 MHz*km) at max. resolution	
	66 m over multimode fibers (50/125 µm, 400 MHz*km) at max. resolution	
Connection	1 × LC duplex socket	
No. of fiber optics	2	
Connection with USB 2.0	1 additional LC duplex socket	
USB 2.0 transmission	2 additional fiber optics	
Audio/RS232 transmission	no additional fiber optics	
Network interfaces	2 × RJ45 socket	
Main power supply		
Type	internal power pack	
Connection	1 × IEC plug	
Voltage	AC100-240V/60-50Hz	
	0.5-0.2A	0.5-0.2A
When equipped with USB 2.0	0.5-0.2A	0.7-0.3A
Redundant power supply		
Type	internal power pack	
Connection	1 × IEC plug	
Voltage	AC100-240V/60-50Hz	
	0.5-0.2A	0.5-0.2A
USB 2.0 variant	0.5-0.2A	0.7-0.3A
Casing		
Material	anodised aluminium	
Desktop (W × H × D)	435 × 44 × 285 mm	
Rackmount (W × H × D)	19" × 1 U × 285 mm	
Weight	approx. 2.2 kg	
When equipped with USB 2.0	approx. 2.3 kg	
Update		
Process	via network	
Connection	network port	
Operating environment		
Temperature	+5 to +45 °C	
Air humidity	< 80% non-condensing	
Conformity	CE, RoHs	

DL-Vision Multi-Channel 2



left: DL-Vision-(S)-MC2-ARU2-CPU computer module
right: DL-Vision-(S)-MC2-ARU2-CPU user module

	Computer module	User module
Video		
Number of monitors	2	2
Signal type/video	DVI dual link, backward-compatible to single link	
Resolution	up to 2 x 2560 × 1600 @ 60 Hz or 2 x 2048 × 2048 @ 60 Hz	
Standards	E-DDC support	
Colour depth	24 bit	
Pixel rate	up to 330 MHz	
Interfaces for user console	1 × DVI-D socket	1 × DVI-D socket
Interfaces to computer	1 × DVI-D socket	
Keyboard/Mouse		
Interfaces for user console	2 × Mini-DIN 6 socket	
	2 × USB-A socket	
Interfaces to computer	2 × Mini-DIN 6 socket	
	1 × USB-B socket	
Audio		
Design	internal	
Sampling rate	96 kHz	
Resolution	24 bit digital, stereo	
Bandwidth	22 kHz	
Interfaces for user console		1 × 3.5 mm jack plug (speaker)
Interfaces to computer	1 × 3.5 mm jack plug (line in)	
RS232		
Design	internal	
Transmission rate	max. 230,400 bit/s	
Transmittable signals	RxD, TxD, RTS, CTS, DTR, DSR, DCD	
Interfaces for user console		1 × D-Sub 9 plug
Interfaces to computer	1 × D-Sub 9 socket	
Transparent USB 2.0		
Design	internal	
Transmission rate	up to 2,000 m	
USB power supply	High Power devices up to 500 mA	
USB transmission rate	up to 480 mbps	
Interfaces for user console		4 × USB-A socket
Interfaces to computer	1 × USB-B socket	

DL-Vision Multi-Channel 2

Transmission	
Type of cable connection	dedicated fiber optic link
Transmission cable type	fiber optics
Transmission length	10,000 m over singlemode fibers (9/125 µm, 2.000 MHz*km, OS1) at max. resolution 2,000 m over singlemode fibers (9/125 µm, 2,000 MHz*km, OS1) at max. resolution 550 m over multimode fibers (50/125 µm, 500 MHz*km, OM2) at max. resolution 500 m over multimode fibers (50/125 µm, 400 MHz*km) at max. resolution 275 m over multimode fibers (62,5/125 µm, 200 MHz*km, OM1) at max. resolution 220 m over multimode fibers (62,5/125 µm, 160 MHz*km) at max. resolution 66 m over multimode fibers (50/125 µm, 400 MHz*km) at max. resolution
Connection	1 × LC duplex socket
No. of fiber optics	2
Connection with USB 2.0	1 additional LC duplex socket
USB 2.0 transmission	2 additional fiber optics
Audio/RS232 transmission	no additional fiber optics
Network interfaces	2 × RJ45 socket
Main power supply	
Type	internal power pack
Connection	1 × IEC plug
Voltage	AC100-240V/60-50Hz
	0.5-0.2A
When equipped with USB 2.0	0.5-0.2A
Redundant power supply	
Type	internal power pack
Connection	1 × IEC plug
Voltage	AC100-240V/60-50Hz
	0.5-0.2A
USB 2.0 variant	0.5-0.2A
Casing	
Material	anodised aluminium
Desktop (W × H × D)	435 × 44 × 285 mm
Rackmount (W × H × D)	19" × 1 U × 285 mm
Weight	approx. 2.2 kg
When equipped with USB 2.0	approx. 2.3 kg
Update	
Process	via network
Connection	network port
Operating environment	
Temperature	+5 to +45 °C
Air humidity	< 80% non-condensing
Conformity	CE, RoHS

List of Item Numbers Single-Channel

Item No.	Target module	Audio- RS232	USB 1.1	USB 2.0	Desktop	Rack- mount
A1210066	DL-Vision(S)-AR-CPU	AR			DT	RM
A1210067	DL-Vision(S)-ARU2-CPU	AR	U	U2	DT	RM
A1210068	DL-Vision(M)-AR-CPU	AR			DT	RM
A1210069	DL-Vision(M)-ARU2-CPU	AR	U	U2	DT	RM
CON	User module					
A1220048	DL-Vision(S)-AR-CON	AR			DT	RM
A1220049	DL-Vision(S)-ARU2-CON	AR	U	U2	DT	RM
A1220050	DL-Vision(M)-AR-CON	AR			DT	RM
A1220051	DL-Vision(M)-ARU2-CON	AR			DT	RM
A1800009	DLV-Power					

List of Item Numbers Multi-Channel

Item No.	Target module	Audio- RS232	USB 1.1	USB 2.0	Desktop	Rack- mount
A1210070	DL-Vision(S)-MC2-AR-CPU	AR			DT	RM
A1210071	DL-Vision(S)-MC2-ARU2-CPU	AR	U	U2	DT	RM
A1210072	DL-Vision(M)-MC2-AR-CPU	AR			DT	RM
A1210073	DL-Vision(M)-MC2-ARU2-CPU	AR	U	U2	DT	RM
CON	User module					
A1220052	DL-Vision(S)-MC2-AR-CON	AR			DT	RM
A1220053	DL-Vision(S)-MC2-ARU2-CON	AR	U	U2	DT	RM
A1220054	DL-Vision(M)-MC2-AR-CON	AR			DT	RM
A1220055	DL-Vision(M)-MC2-ARU2-CON	AR			DT	RM
A1800009	DLV-Power					

Legend

ABBREVIATIONS

CPU = Computer module
PC = Computer module


CON = User module
REM = User module

MC2 = Multichannel 2
MC3 = Multichannel 3
MC4 = Multichannel 4


M = Multimode
S = Singlemode
RM = For assembly in a 19" rack


A = Audio
AR = Audio + RS232
R = RS232
U = transparent USB 1.1
U2 = transparent USB 2.0
D = Delay


EQUIPMENT FEATURES

 = keyboard/mouse


 = dual-link DVI video


 = single-link DVI video


 = single-link DVI + VGA

 = VGA video


 = Audio

 = RS232


 = USB 1.1


 = USB 2.0

 = Delay


 = Screen Freeze

 = Power Switching

 = Fire Wire


 = VT100


 = KVM IP access


 = Network connection


 = Web interface


 = DevCon support


 = Monitoring

 = CAT cable

 = Fiber optics

 = Single user

 = Multi user

 = Separat local/remote user