



Front view :

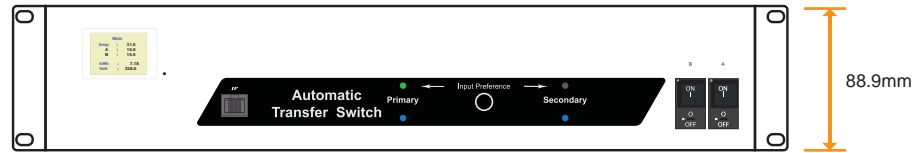


88.9mm

Top View :

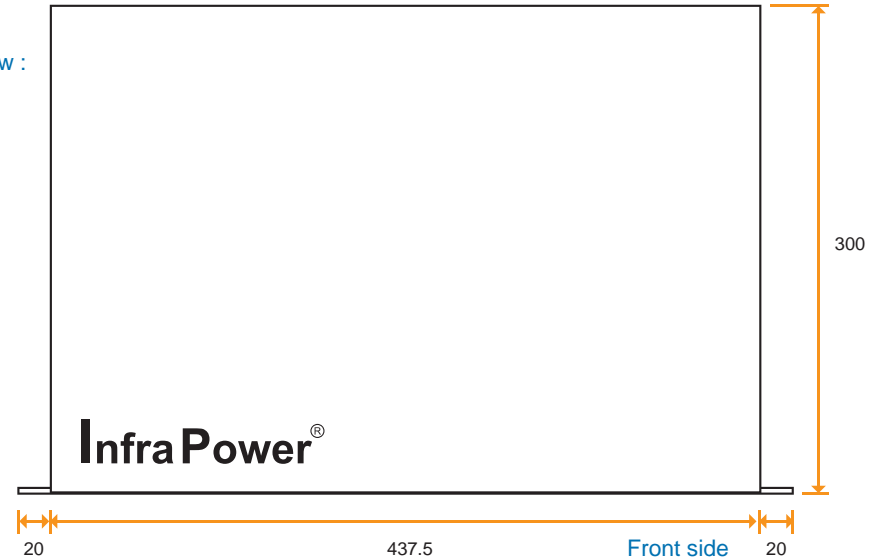

Rear view :

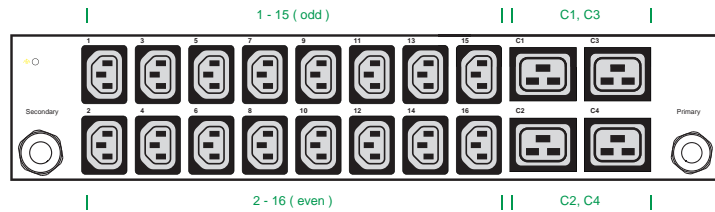

32A model :	Fuse	MCB
ATS-H16C13/4C19-32A-W_EN	-	2



- Input Rating : 32A, 230V
- Inlet : 32A IEC60309 2P+E plug x 2
- Cordset : 3 meter 4.0mm sq. H05V V-F cordset x 2
- Protection : 16A single pole hydraulic MCB x 2
- Circuit Details : < **Circuit A** > Output 16A max. C13 #1-15 (odd) + C19 #C1, C3
< **Circuit B** > Output 16A max. C13 #2-16 (even) + C19 #C2, C4

Automatic transfer switch
Outlet : 10A Rated IEC320 C13 x 16
16A Rated IEC320 C19 x 4

AUSTIN HUGHES
Design. Manufacturing. Global Services.

The company reserves the right to modify product specifications without prior notice and assumes no responsibility for any error which may appear in this publication.

Copyright 2018 Austin Hughes Electronics Ltd. All rights reserved.

ATS Specification :
Nominal input voltage : 230V
Acceptable input voltage : ±10% nominal
Input frequency : 50 / 60Hz
Transfer time : 10 - 14ms typical
Electrical endurance : 1 x 10⁵ operations
Power consumption : Approx. 20W

Meter Features
Local Display : 1.8" color LCD
Measurement : Voltage (V), Current (A), energy (kWh) & power factor
Accuracy : ±1% true RMS
IP Access : via built-in IP dongle for network access
SNMP : V2 / V3 version, via built-in IP dongle

EMC Compliance : FCC & CE certified
Safety Compliance : CE / LVD certified
Environment Compliance : RoHS2 & REACH
Operating Temperature : -5 to 60 °C
Storage Temperature : -25 to 65 °C
Operating Altitude : 0 to 2,000 m
Storage Altitude : 0 to 15,000 m
Humidity : 8 to 95% RH, non-condensing
Dimension : 437.5 (W) x 300 (D) x 88.9 (H) mm
Material : Steel
Color : Black (chassis)