RK-2e / RK-2b

1U Short Depth Keyboard Drawer

CyberView™

Benefits

▶ 1U keyboard drawer
▶ 104-key keyboard with either touchpad or trackball
▶ Short depth design of 400mm
▶ Enhanced aesthetics with molded front panel and two point lock
▶ 2-year standard warranty (upgradable up to 5 years)

Options

● MAC or SUN Micro keyboard options available

FC CE RoHS REACH

Product Specifications

Console Port	
KB / MS	USB interface
	Drawer end : attached 6ft USB cable x 2
	Server end : USB type A x 2

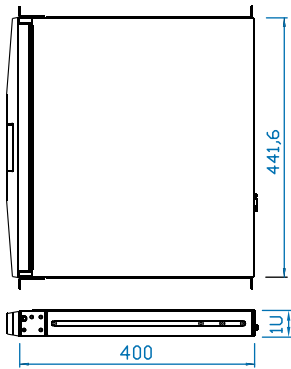| Physical		
Dimensions (W x D x H)	Product	442 x 400 x 44 mm
		17.4 x 15.7 x 1.73 inch
	Packing	582 x 500 x 100 mm
		22.9 x 19.7 x 3.9 inch
Weight	Net	8.6 kg / 18.9 lb
	Gross	10.1 kg / 22.2 lb

* All dimensions stated are subject to change if options are selected / integrated to base model part codes

Mounting Distance	
Keyboard drawer	410 ~ 640 mm
	16.1 ~ 25.2 inch

Environment	
Operating temp.	-20 to 65°C degree
Storage temp.	-20 to 60°C degree
Operating humidity	20~90%, non-condensing
Storage humidity	5 ~90%, non-condensing
Operating altitude	16,000 ft
Non-operating altitude	40,000 ft
Shock	10G acceleration (11ms duration)
Vibration	10~300Hz 0.5G RMS random vibration

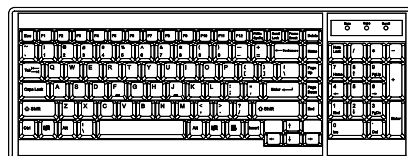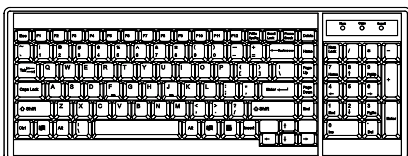| Compliance	
EMC	FCC & CE certified
Safety	CE / LVD certified
Environment	RoHS2 & REACH compliant

Diagrams (mm)

441,6

400

1U

441.6
19"Rackmount

1U

303,7   400

Standard Keyboard

Ge G keyboard integrated with touchpad

Gb G keyboard integrated with trackball

Supporting layouts

America	United States			
EMEA	United Kingdom	Germany	France	Spain	Norway
	Italy	Russia	Switzerland	Netherlands	Portugal
Asia	China	Japan	Korea	Arabia	Turkey

Keyboard Options

* US layout only

Me Mac keyboard with touchpad

Mb Mac keyboard with trackball

Mac

Se S keyboard with touchpad

Sb S keyboard with trackball

SOLARIS®