



Benefits

- ▶ 1U 20" LCD console drawer
- ▶ 1600 x 1200 native resolution / 16.7M colors
- ▶ 104-key keyboard with touchpad
- ▶ One Man installation design
- ▶ Enhanced aesthetics with molded front handle and two point lock
- ▶ 2-year standard warranty (upgradable up to 5 years)

Options

- DVI-D / HDMI 1.2 video input
- S-Video + Composite (BNC)
- Audio input & output
- DC power : 12V / 24V / 48V / 125V
- MAC or SUN Micro keyboard options available

Product Specifications

Console Port

| | |
|-------------------------------|--|
| Video input | VGA |
| KB / MS | USB interface |
| VGA console 6ft cable : CB-6A | Drawer end : DB-15 + USB type A x 2 Server end : DB-15 + USB type A x 2 |

LCD Panel

| | |
|----------------------------------|--------------------------|
| Panel size (diagonal) | 20.1" |
| Native resolution | 1600 x 1200 |
| Brightness (cd/m ²) | 300 |
| Contrast ratio (typ.) | 800 : 1 |
| Colors | 16.7 M |
| Viewing angle (L/R/U/D) | 89/89/89/89 |
| Response time (ms) | 16 |
| Dot pitch (mm) | 0.255 |
| Display area (mm) | 408H x 306V |
| Surface treatment | Anti-glare, Hard-coating |
| Surface hardness | 3H |
| Backlight type | CCFL |
| MTBF (hrs) | 45,000 |

Physical

| | | |
|--------------------------|------------------|--|
| Product (W x D x H) | Single console | 442 x 650 x 44 mm 17.4 x 25.6 x 1.73 inch |
| | Console w/ KVM | 442 x 650 x 44 mm 17.4 x 25.6 x 1.73 inch |
| Packing (W x D x H) | Single console / | 595 x 860 x 140 mm |
| | Console w/ KVM | 23.4 x 33.9 x 5.5 inch |
| Net weight | Single console | 14.5 kg / 31.9 lb |
| | Console w/ KVM | 15.5 kg / 34.1 lb |
| Gross weight | Single console | 22 kg / 48.4 lb |
| | Console w/ KVM | 23.4 kg / 51.5 lb |

* All dimensions stated are subject to change if options are selected / integrated to base model part codes

Mounting Distance

| | |
|--|--------------------------------|
| Single console drawer / Console w/ KVM drawer | 660 ~ 870 mm 26 ~ 34.3 inch |
|--|--------------------------------|

Video Option

| | | |
|---------|-------------------|---------------------|
| Digital | DVI | DVI-D single link |
| | HDMI | HDMI 1.2 / HDCP 1.1 |
| Analog | S-Video (4-pin) | NTSC & PAL |
| | Composite (BNC) | NTSC & PAL |

Audio Option

| | | |
|---------|-----------------------------|-------------------|
| Input | Connector | 3.5mm stereo jack |
| | Impedance / Power level | 30kΩ / 750mV |
| Output | Connector | 3.5mm stereo jack |
| | Resistance / Power level | 30kΩ / 2.8V |
| Speaker | Dual stereo | 2W x 2 |

Power

| | | |
|----------------------------------|---------------------------------------|---------------------|
| Input | Auto-sensing 100 to 240VAC, 50 / 60Hz | |
| Consumption (console / KVM) | Screen on | Max. 48W / Max. 78W |
| | Power saving mode | Max. 4W / Max. 34W |
| | Power button off | Max. 1W / Nil |

Environment

| | |
|------------------------|------------------------------------|
| Operating temp. | 0 to 55°C degree |
| Storage temp. | -20 to 60°C degree |
| Operating humidity | 20~90%, non-condensing |
| Storage humidity | 5 ~90%, non-condensing |
| Operating altitude | 16,000 ft |
| Non-operating altitude | 40,000 ft |
| Shock | 10G acceleration (11ms duration) |
| Vibration | 10~300Hz 0.5G RMS random vibration |

Compliance

| | |
|-------------|-------------------------|
| EMC | FCC & CE certified |
| Safety | CE / LVD certified |
| Environment | RoHS2 & REACH compliant |

L120 models w/ KVM

| | | | |
|---------------|-----------|---------------|---------------|
| 2K KVM | IP | Remote | 8-port |
| | 0 | 0 | L120 - 801D |

2K KVM Cable



CH - 6D (6 ft)
DVI-D KVM cable




CH - 6H (6 ft)
HDMI KVM cable

Resolution: 16:9 - max. 2560 x 1440
Support **: 16:10 - max. 1920 x 1200
4:3 - max. 1600 x 1200

| | | | |
|------------------|-----------|---------------|----------------|
| DVI-D KVM | IP | Remote | 12-port |
| | 0 | 0 | L120 - 1201D |

DVI-D USB KVM Cable


Resolution: 16:10 - max. 1920 x 1200
Support **: 16:9 - max. 1920 x 1080
4:3 - max. 1600 x 1200




CI - 6 (6 ft)
CI - 15 (15 ft)

| | | | | | |
|------------------------|-----------|---------------|---------------|-----------------|-----------------|
| Cat6 Matrix KVM | IP | Remote | 8-port | 16-port | 32-port |
| | 1 | 1 | - | L120 - MUIP1613 | L120 - MUIP3213 |
| | 2 | 1 | - | L120 - MUIP1624 | L120 - MUIP3224 |
| | 0 | 1 | - | L120 - MU1602 | L120 - MU3202 |
| | 0 | 2 | - | L120 - MU1603 | L120 - MU3203 |
| | 0 | 3 | - | L120 - MU1604 | L120 - MU3204 |


Cat6 KVM Dongle




DG - 100P
DP - USB dongle




DG - 100H
HDMI - USB dongle



DG - 100SD
DVI - USB dongle



DG - 100S
VGA - USB dongle




DG - 100
VGA - PS/2 dongle

Resolution: 16:10 - max. 1920 x 1200
Support **: 16:9 - max. 1920 x 1080
4:3 - max. 1600 x 1200


| | | | | | |
|-----------------------|-----------|---------------|---------------|----------------|----------------|
| Cat6 Combo KVM | IP | Remote | 8-port | 16-port | 32-port |
| | 1 | 0 | L120 - UIP802 | L120 - UIP1602 | L120 - UIP3202 |
| | 0 | 1 | L120 - U802 | L120 - U1602 | L120 - U3202 |
| | 0 | 0 | L120 - U801 | L120 - U1601 | L120 - U3201 |

| | | | | |
|-------------------------|-----------|---------------|---------------|----------------|
| DB-15 Matrix KVM | IP | Remote | 8-port | 16-port |
| | 1 | 1 | L120 - MIP813 | L120 - MIP1613 |
| | 2 | 1 | L120 - MIP824 | L120 - MIP1624 |
| | 0 | 1 | L120 - M802 | L120 - M1602 |
| | 0 | 2 | L120 - M803 | L120 - M1603 |
| | 0 | 3 | L120 - M804 | L120 - M1604 |


DB-15 VGA USB KVM Cable



CB - 6 (6 ft)



CB - 10 (10 ft)





CB - 15 (15 ft)

Resolution: 16:10 - max. 1920 x 1200
Support **: 16:9 - max. 1920 x 1080
4:3 - max. 1600 x 1200







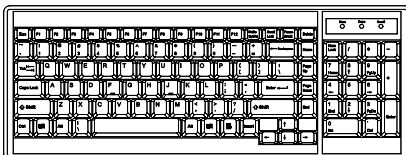









| | | | | |
|------------------------|-----------|---------------|---------------|----------------|
| DB-15 Combo KVM | IP | Remote | 8-port | 16-port |
| | 1 | 0 | L120 - IP802 | L120 - IP1602 |
| | 0 | 1 | L120 - 802 | L120 - 1602 |
| | 0 | 0 | L120 - S801 | L120 - S1601 |

Standard Keyboard

Ge G keyboard integrated with touchpad



Supporting layouts

| | | |
|--|--|--|
| <p>America</p> <p> United States</p> | <p>    </p> <p>EMEA</p> <p>    </p> | <p>Asia</p> <p>    </p> |
|--|--|--|

Keyboard Options

* US layout only

Me Mac keyboard with touchpad



Se S keyboard with touchpad

