



# 1-Phase 230V 32A switched PDU drawing & specification

Model : H14C13/6C19-32A-WS/CR\_EN/3B-1


Front view :

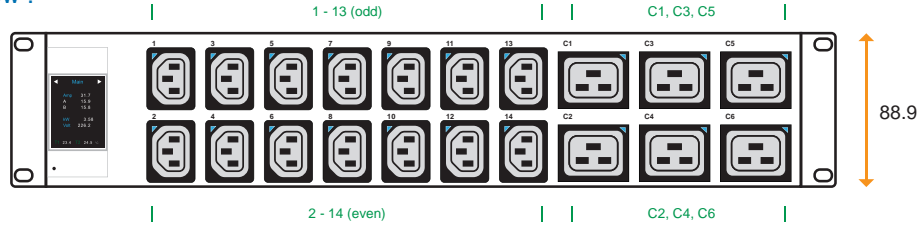


Top View :

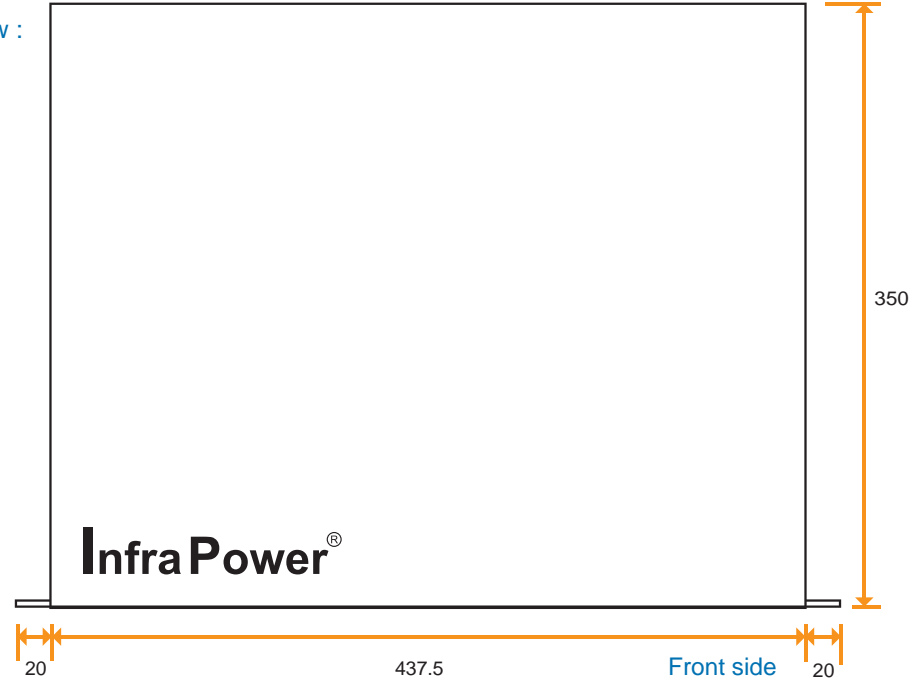

Rear view :

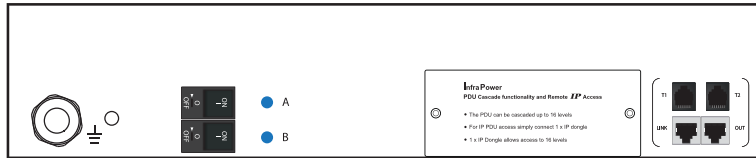

Circuit A

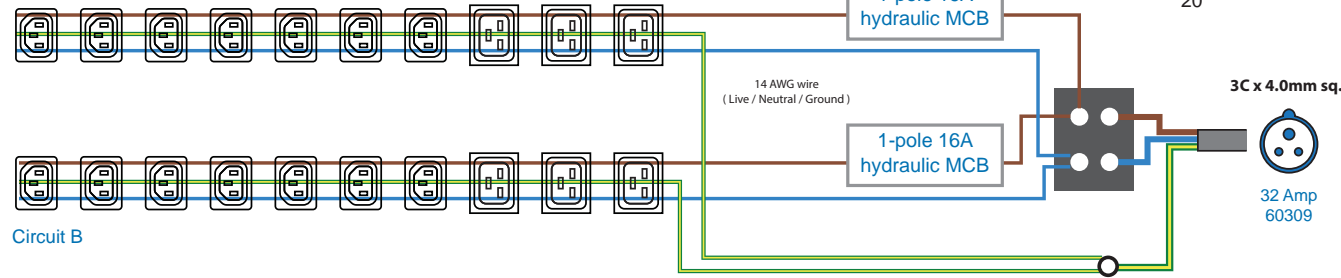

unit : mm

### Single phase switched PDU

Input Rating : 32A, 230V  
 Outlet : 10A rated C13 x 14  
 16A rated C19 x 6  
 Inlet : 32A IEC60309 2P+E plug  
 Cordset : 3 meter 4.0mm sq. H05V V-F cordset  
 Protection : 16A single pole hydraulic MCB x 2  
 Circuit Details : < Circuit A > Output 16A max. C 13 # 1-13 (odd) + C 19 # C1, C3, C5  
 < Circuit B > Output 16A max. C 13 # 2-14 (even) + C 19 # C2, C4, C6

### Meter Features ( WS Switched PDU )

Local Display : Field replaceable 2.0" color LCD with touchscreen  
 Bank Measurement : Current ( A ), Energy ( kWh ), Voltage ( V ) & Power factor  
 Outlet Control : Outlet Switch ON / OFF  
 Accuracy : ±1% Billing-grade  
 IP Access : via IP dongle, one IP Access up to 16 PDU Levels  
 Cascade : Up to 16 PDU under single IP address via IP dongle  
 SNMP : V2 / V3 via IP dongle  
 Sensor Port x 2 : Temp. Sensor / Temp. + Humid. Sensor

EMC Compliance : CE / EMC certified  
 Safety Compliance : CE / LVD certified  
 Environment Compliance : RoHS2 & REACH

Operating Temperature : -5 to 60 °C  
 Storage Temperature : -25 to 65 °C  
 Operating Altitude : 0 to 2,000 m  
 Storage Altitude : 0 to 15,000 m  
 Humidity : 8 to 95% RH, non-condensing

Chassis Material : Steel  
 Chassis Color : Black

Product Dimension : 437.5 (W) x 350 (D) x 88.9 (H) mm  
 Net Weight : 6.4 kg

Packing Dimension : 525 (W) x 460 (D) x 130 (H) mm  
 PDU Gross Weight : 7.0 kg