


1-Phase switched PDU specification drawing

230V 16A / 20A / 32A PDU : C13 x 20 + C19 x 6

unit : mm

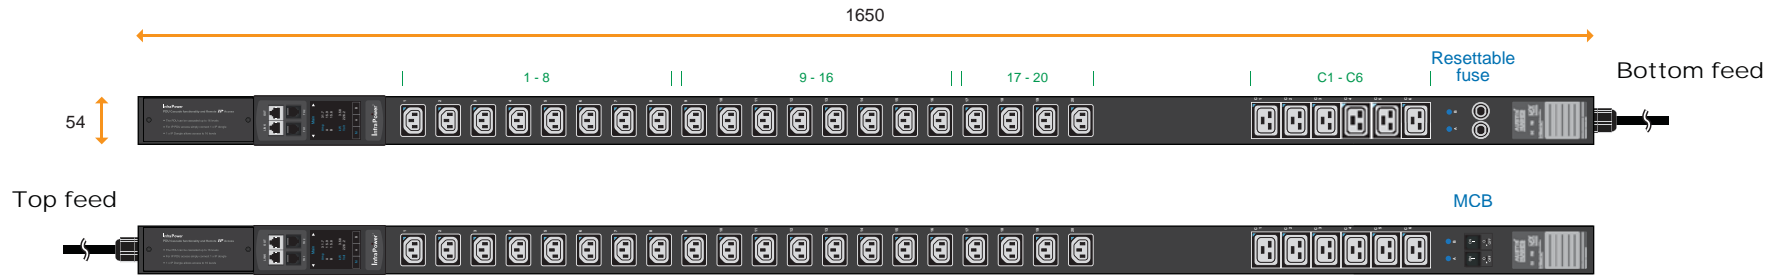

| PDU Feed | Code |
|----------|------|
| Bottom | B |
| Top | T |



| 32A model : | Circuit Protection |
|-------------------------------|---------------------|
| V20C13/6C19-32A-WS/F_EN/3B-1 | Resettable Fuse x 2 |
| V20C13/6C19-32A-WS/CR_EN/3T-1 | 1-pole MCB x 2 |

Input Rating : 32Amp, 230V
Cordset : 3 meter 4.0mm sq. H05V V-F cordset
Protection : 16A resettable fuse or 16A hydraulic MCB x 2
Circuit A : Output 16A max., C13 #1-10 + C19 #C1-C3
Circuit B : Output 16A max., C13 #11-20 + C19 #C4-C6
Weight : Net 7.89 Kg / Gross 9.50 Kg

| Chassis Color | Code |
|---------------|------|
| Black | 1 |
| White | 2 |
| Red | 3 |
| Blue | 4 |
| Green | 5 |
| Orange | 6 |
| Yellow | 7 |
| Purple | 8 |



| 20A model : | Circuit Protection |
|-------------------------------|---------------------|
| V20C13/6C19-20A-WS/F_OE/3B-1 | Resettable Fuse x 1 |
| V20C13/6C19-20A-WS/CR_OE/3T-1 | 1-pole MCB x 1 |

Input Rating : 20Amp, 230V
Cordset : 3 meter 2.5mm sq. H05V V-F cordset
Protection : 20A resettable fuse or 20A hydraulic MCB x 1
Circuit : Output 20A max., C13 #1-20 + C19 #C1-C6
Weight : Net 7.12 Kg / Gross 8.74 Kg



| 16A model : | Circuit Protection |
|-------------------------------|---------------------|
| V20C13/6C19-16A-WS/F_EN/3B-1 | Resettable Fuse x 1 |
| V20C13/6C19-16A-WS/CR_EN/3T-1 | 1-pole MCB x 1 |

Input Rating : 16Amp, 230V
Cordset : 3 meter 1.5mm sq. H05V V-F cordset
Protection : 16A resettable fuse or 16A hydraulic MCB x 1
Circuit : Output 16A max., C13 #1-20 + C19 #C1-C6
Weight : Net 7.05 Kg / Gross 8.67 Kg



| 16A model : | Circuit Protection |
|--------------------------------|---------------------|
| V20C13/6C19-16A-WS/F_C20/3B-1 | Resettable Fuse x 1 |
| V20C13/6C19-16A-WS/CR_C20/3T-1 | 1-pole MCB x 1 |

Input Rating : 16Amp, 230V
Cordset : 3 meter 1.5mm sq. H05V V-F cordset
Protection : 16A resettable fuse or 16A hydraulic MCB x 1
Circuit : Output 16A max., C13 #1-20 + C19 #C1-C6
Weight : Net 6.98 Kg / Gross 8.59 Kg

Operating Temperature : -5 to 60 °C
Storage Temperature : -25 to 65 °C
Operating Altitude : 0 to 2,000 m
Storage Altitude : 0 to 15,000 m
Humidity : 8 to 95% RH, non-condensing

Meter Features (WS Switched PDU)

Local Display : Field replaceable 2.8" color LCD with touchscreen
Bank Measurement : Current (A), Energy (kWh), Voltage (V) & Power factor
Outlet Control : Outlet Switch ON / OFF
Accuracy : ±1% Billing-grade
IP Access : via IP dongle, one IP Access up to 16 PDU Levels
Cascade : Up to 16 PDU under single IP address via IP dongle
SNMP : V2 / V3 via IP dongle
Sensor Port x 2 : Temp. Sensor / Temp. + Humid. Sensor

EMC Compliance : CE / EMC certified
Safety Compliance : CE / LVD certified
Environment Compliance : RoHS2 & REACH